


SECTION A-A

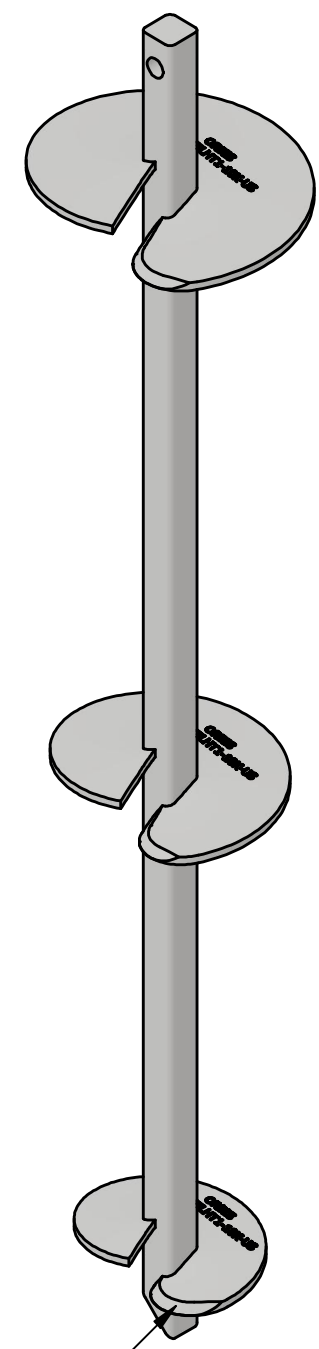

45° LEADING EDGE

NOTES:

1. FINISH: HOT DIP GALVANIZED AS PER ASTM 153
2. TORQUE RATING: 10,000 FT-LBS
3. SHAFT MATERIAL ROUND-CORNERED-SQUARE (RCS) SOLID STEEL BARS; MINIMUM YIELD STRENGTH 90KSI.
4. HELIX MATERIAL STEEL PLATE, MINIMUM YIELD STRENGTH 50KSI; 3/8" THICK
5. WEIGHT: 105 LBS
6. ALL WELDING AS PER AWS CODE D1.1
7. ALL DIMENSIONS ARE IN INCHES.

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE EXCLUSIVE PROPERTY OF ORBIS MANUFACTURING



DRAWN	MSM	DATE	21-07-2022
APPROVED	DMM	DATE	26-07-2022
REVISION	MSM	DATE	19-12-2025

DRAWING NUMBER
ARCS175LTH1-10K-US
DESCRIPTION
ANCHOR LEAD TRIPLE HELIX 12,10,8" 10K FT-LBS 100K LBS TENSILE 66" RCS SHAFT 1.75"